

CONCRETE MOISTURE ENCOUNTER X5



The Tramex Concrete Moisture Encounter X5 is a non-destructive digital multi moisture meter for concrete floors and slabs providing instant and precise quantitative measurement of moisture content using Gravimetric testing as a baseline. The CMEX5 also provides quantitative Carbide Method equivalent readings for Concrete and Anhydrite/Gypsum substrates. In addition, the CMEX5 has two reference scales for comparative readings as per ASTM F2659. Incorporating plug-in ports for the optional Hygro-i2® relative humidity probe testing per ASTM F2170 and heavy-duty pin-type wood probes, this moisture meter transforms into the ideal all-in-one instrument for the flooring professional.



Product Order Code: CMEX5

FEATURES



NON-DESTRUCTIVE



IN SITU
RH, T, DP, g/kg




AMBIENT
RH, T, DP, g/kg



ACCOMPANYING
APP

HOW IT WORKS

The Concrete Moisture Encounter X5 detects and evaluates the moisture conditions within the slab or screed by non-destructively measuring the electrical impedance. A low frequency electronic signal is transmitted into the material under test via the electrodes in the base of the instrument. The strength of this signal varies in proportion to the amount of moisture present in the material. The Concrete Moisture Encounter X5 determines the strength of the current and converts this to a quantitative moisture content value for concrete slabs and anhydrite/gypsum floor screeds, displayed on a large clear digital dial.

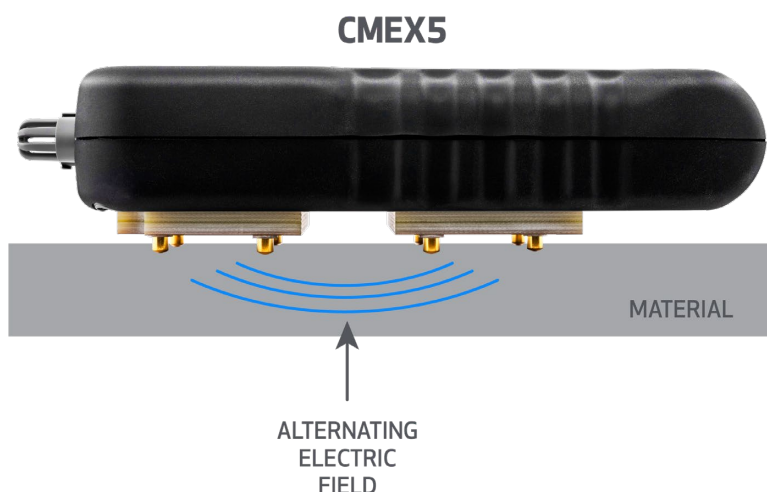


HYGROMETER MODE

When the optional Tramex Hygro-i2[®] relative humidity probe is plugged into the Concrete Moisture Encounter X5, the instrument automatically changes to Hygrometer Mode, allowing for in situ relative humidity (RH) testing of floor slabs per ASTM F2170 and BS 8201, 8203 Hood Method, as well as ambient conditions of temperature, relative humidity, dew point and mixing ratios. This resilient probe is reusable and can be checked regularly for calibration.

WOOD PIN-PROBE MODE

By plugging in the optional handheld or hammer probe, the Concrete Moisture Encounter X5 converts to Pin Mode and becomes a resistance type pin meter for determining the moisture content of wood and wood based products. The Concrete Moisture Encounter X5 provides moisture content readings from 5% to 30% in wood. A species adjustment table and a temperature adjustment chart are supplied for precise readings in woods of varying densities and readings taken at various temperatures.



0-6.9%

CONCRETE %MC
READING RANGE



0-4.3

CM EQUIV CONCRETE
READING RANGE



0-2.7

CM EQUIV ANHYDRITE/
GYPSUM READING RANGE




0-12

GYPSUM REFERENCE
READING RANGE



5-30%

WOOD %MC
READING RANGE



EXTENSION HANDLE
(optional)

SPECIFICATIONS

| | |
|-----------------------------------|--|
| Size: | 180mm x 85mm x 40mm (7.1" x 3.4" x 1.6") |
| Weight: | 357g (12.59oz) |
| Construction: | ABS Body |
| Power: | 2 x AALR6 ALKALINE (included) |
| Display: | Digital |
| Depth of penetration in concrete: | approx. 20mm (3/4") |

MEASURING RANGE

| | |
|---|---------------------------------|
| Moisture content for Concrete: | 0 → 6.9 % |
| Comparative for Gypsum floor screed: | 0 → 12 |
| CM Equiv Anhydrite, Gypsum / Concrete: | 0 → 2.7 / 0 → 4.3 |
| Reference scale: | 0 → 100 |
| Relative Humidity: | 0 → 99% |
| (with optional Hygro-i2 [®] probe) | |
| Humidity accuracy: | 0% → 99%RH +/- 2% @ 25°C / 77°F |
| Moisture content for wood: | 5 → 30 % |
| (with optional wood pin probes) | |

Free App Available for Mobile and Tablet:

